




Quality You Can Trust Since 1886...From North America's
Largest Roofing Manufacturer



ETB-27730

**Human Resources Building
3231 Civic Center Dr.
Torrance, CA 90503**

8/6/14

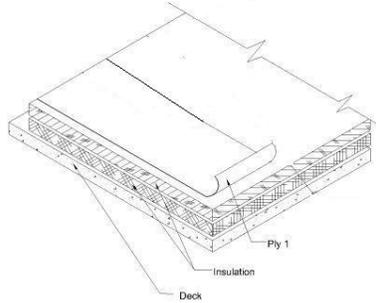

Existing:
Plywood Deck
3/4" Wood Fiber
BUR G

SPECIFICATION: TMA180

COMPONENT	TYPE	REQUIRED	ATTACHMENT	RATE OF APPLICATION
DECK	Plywood		Per Code	
ROOF BOARD	1/4" Securock® Roof Board ASTM C-1278	One (1) layer	Fastened with Drill-Tec™ #12 Standard Fasteners & 3" plates	Per GAF® requirements
SINGLE PLY MEMBRANE	EverGuard® TPO 80 mil ASTM D-6878	One (1) ply	Fastened with Drill-Tec™ #14 HD Fasteners & 2 3/8" Plates	Per GAF® requirements
FLASHING MEMBRANE	EverGuard® TPO 80 mil ASTM D-6878	One (1) ply	EverGuard® WB181 or Low VOC TPO Bonding Adhesive	135-145 sq ft/gallon per surface for WB181 bonding adhesive or 100-120 sq ft/gallon per surface for Low VOC adhesives Adhesive is applied to both the substrate surface and the underside of the membrane
GUARANTEE	WeatherStopper® EverGuard® Diamond Pledge™ NDL Roof Guarantee	Twenty (20) years		GUARANTEE FEE APPLICABLE

**All GAF®, MWeld®, Topcoat®, Matrix™, MajorSeal™ and Metalastic® accessories shall be used where applicable.
This system shall be installed by a GAF® Master or Master Select™ Contractor.**

Each roof has unique requirements. This specification is a graphic representation of products and their installation. To properly assess specific roofing needs, code compliance, system configurations and warranty eligibility, contact Contractor Services. Note: Your Area Field Services or Technical Services Managers are the only employees who can approve any deviation from GAF's published specification manual(s). Always review the appropriate Application & Specification Manual (EverGuard, Topcoat or GAF Asphaltic) before commencing this project, as the Manual may contain information that is important for a successful installation.

This Cut Spec specification shall not waive, supersede or alter the requirements and recommendations found in the most current Application & Specification Manual(s) referenced above, printed technical bulletins or specific correspondence drafted for this project by the Area Field Services or Technical Services Manager.

Architectural Information Services 1212 Brai Drive Port Arthur, TX 77640
Ph: 1-800-522-9224 Fax: 409-721-5785